

Laron


robust, efficient, cost-effective

- ideal weight distribution
- guarantees smooth welding
- service-friendly thanks to standard electronics
- digital display of temperature and speed
- automatic start-up system
- steady and building site-friendly design to weld all thermoplastic roofing materials and membranes



Smooth welding due to an ideal weight distribution.

Economical and operator-friendly thanks to high welding speed and building site-proved design.

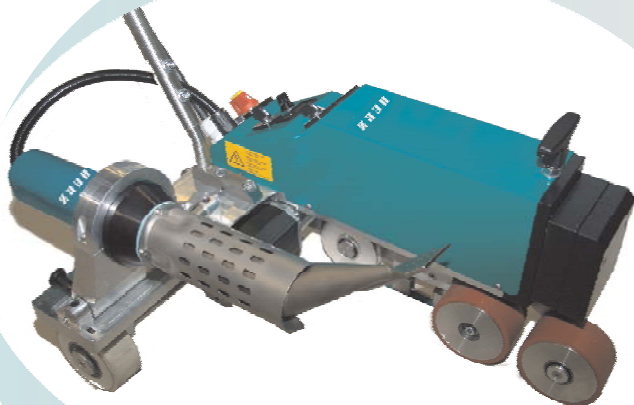

Technical data:

| | | |
|------------------------|--------|-----------------|
| Voltage | V | 230/400 |
| Frequency | Hz | 50/60 |
| Power | W | 4600/5700 |
| Temperature | °C | 20–620 |
| Drive | m/min. | 0 - 7 |
| Dimensions (l x w x h) | mm | 620 x 400 x 320 |
| Weight | Kg | 35 |
| Mark of conformity | CE | |

4600 Watt / 230 Volt
Order-No. 5215939

5700 Watt / 400 Volt
Order-No. 5215996